



All-plastic cable reel Generation 7 Companion For permanent outdoor use.

Article number: EAN: Customs tariff number: Country of origin:

K7A25NTF101Z 8715883032261 8544429090 DE (non-preferential origin)




Manufacturer:

HEDI GmbH Elektro- und Gerätebau, Schöneggweg 17, D-87727 Babenhausen

Dimensions:

- Total height:	
- Reel housing diameter:	
- Width (feet):	
- Depth:	

365 mm 250 mm 260 mm 240 mm



Accessories

(included in delivery):

twist grip cable guide

Spare parts:

on request from the manufacturer

Carton (inner dimension LxWxH): 270 x 232 x 335 mm

Weight:

6.15 kg

Environmental / operating -25 ... +40°C temperature:

DATAHEET



Material:

- Cable:
- Plug:
- Feet:
- Reel housing:
- Cable guide:
- Socket insert:

Electrical data:

- Operating voltage:
- Power rating:
- Cable:
- Plug:
- Socket:

neoprene-rubber (oil- and UV-resistand) rubber PA6GF30 PP, red PA6 PP, sealing elements made of rubber

230 V ~ 50/60 Hz / 16 A cable wound up 1,100 watts cable unwound 3,500 watts 25 m H07RN-F 3G1.5 mm² safety plug 16 A 2P+E 250 V / IP54 3-fold safety socket German 16 A / 250 V / IP44 / with thermal protection switch and diagnosis system DiagS: - Green light on: → Cable reel ready for operating. - Green + red light on:


- \rightarrow Thermal protection switch has tripped.
- \rightarrow Power supply has been interrupted.

- Protection class:
- Protection rating:
- Area of application:

IP44

I

For permanent outdoor use as well as on constructions sites. Conforms tot he specifications of the DGUV-I 203-006 (formerly BGI 608) as well as of the DGUV I 203-005 (formerly BGI 600), K2.

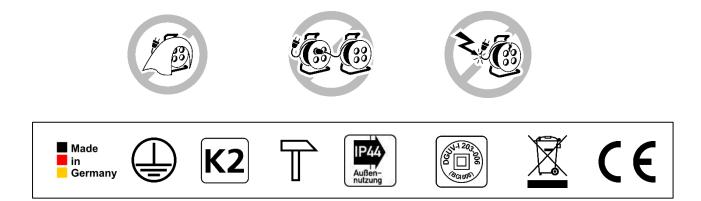

Status: 31.07.2024