


# TECHNICAL DATASHEET

## 4tecx valdorpel

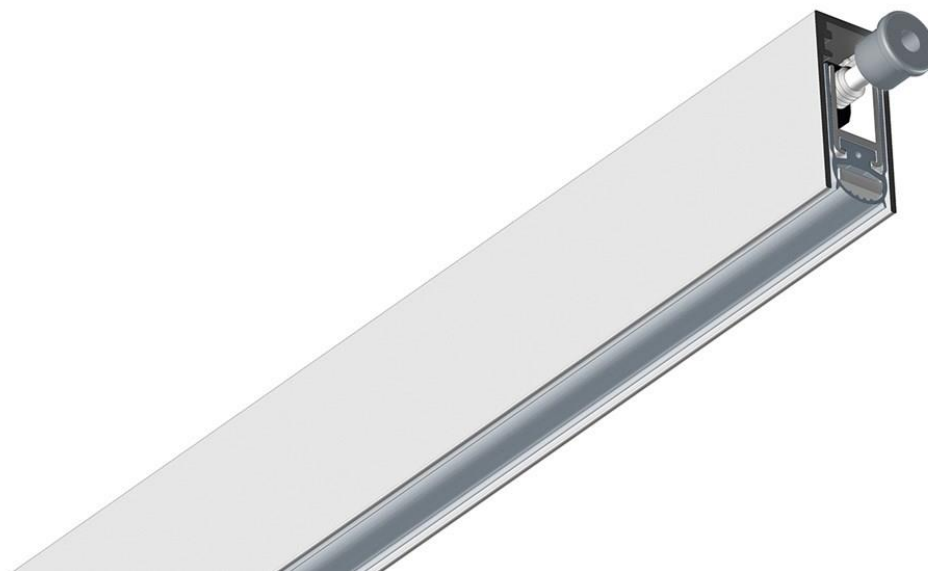

| Art.nr.    | Length  | Maximum drop | Minimal order unit | EAN-Code      |
|------------|---------|--------------|--------------------|---------------|
| 4052000103 | 830 mm  | 20 mm        | 1 piece(s)         | 8715883026659 |
| 4052000109 | 930 mm  | 20 mm        | 1 piece(s)         | 8715883026666 |
| 4052000115 | 1030 mm | 20 mm        | 1 piece(s)         | 8715883026673 |
| 4052000121 | 1130 mm | 20 mm        | 1 piece(s)         | 8715883026680 |


| Materials           |                                                                               |
|---------------------|-------------------------------------------------------------------------------|
| External profile    | 6060 T6 Aluminium alloy                                                       |
| Internal profile    | 6060 T6 Aluminium alloy                                                       |
| Available finishing | Mill                                                                          |
| Mechanisms          | Nylon PA6 30% Fiberglass reinforced                                           |
| Seal                | HF3. Self-extinguishing silicone UL94 class V0. Color: Grey                   |
| Closing End-Cap     | Included. Nylon PA6 30% Fiberglass reinforced. Color: Grey                    |
| Activation plunger  | 17. Extrctable nylon plunger with round head with manual adjustment, no tools |
|                     | Required. Nylon PA6 30% Fiberglass reinforced. Color: Grey                    |

| Technical characteristics |                                                                                                                                                               |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum drop (mm)         | 20                                                                                                                                                            |
| Working temperatures (°C) | -35°C / + 200°C                                                                                                                                               |
| Fixing type               | 2F. With premounted screws (3,5x30 pan head (wood) or 3,5x32 (steel) counter-sunk nickel plated screws) or 1F. with stainless steel brackets (includes 3,5x20 |
|                           | Countersunk nickel plated screws)                                                                                                                             |

| Certificates                |                                              |
|-----------------------------|----------------------------------------------|
| Working cycles              | 200.000 (internal test)                      |
| Acoustic insulation 52dB Rw | Cert. n. PB-Z03-G03-04-en-01 – IFT Rosenheim |
| Fire resistance 60 minutes  | Cert. n. CFR1605191 / UL-10C file nr. R39141 |
|                             | Smoke tested                                 |

| Art.nr.    | Length  | Item weight | Maximum trimming | Trimming from -> to (mm) |
|------------|---------|-------------|------------------|--------------------------|
| 4052000103 | 830 mm  | 0,394 kgs   | 150 mm           | 830 -> 680               |
| 4052000109 | 930 mm  | 0,442 kgs   | 150 mm           | 930 -> 780               |
| 4052000115 | 1030 mm | 0,489 kgs   | 150 mm           | 1030 -> 880              |
| 4052000121 | 1130 mm | 0,536 kgs   | 150 mm           | 1130 -> 980              |

## NO AIR

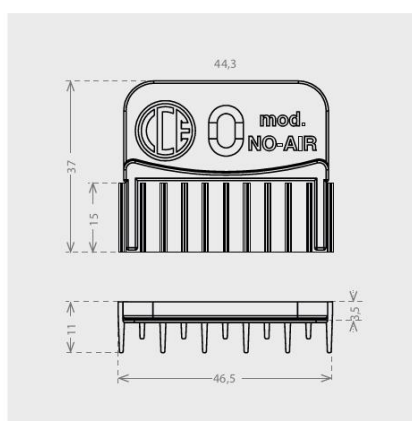

### ITEM SIZE (mm)

44 x 37

### COMB HEIGHT (mm)

11

### AVAILABLE LENGHTS (mm)

/

| Materials             |                                                   |
|-----------------------|---------------------------------------------------|
| Hard plastic supports | Nylon PA6 30% Fiberglass reinforced. Color: black |
| Soft comb             | TPV 60 shore. Color: Black                        |
| Available finishing   | Black (standard), grey (on request)               |

| Technical characteristics |                                                                            |
|---------------------------|----------------------------------------------------------------------------|
| Working temperatures (°C) | -35°C / +200°C                                                             |
| Fixing type               | With 3,5x20 countersunk screws (not included)                              |
|                           | Available in kit (cod.ACNOAK) of 2 pcs with nr.2 ACNOA + nr. 2 countersunk |
|                           | Screws in single bag                                                       |