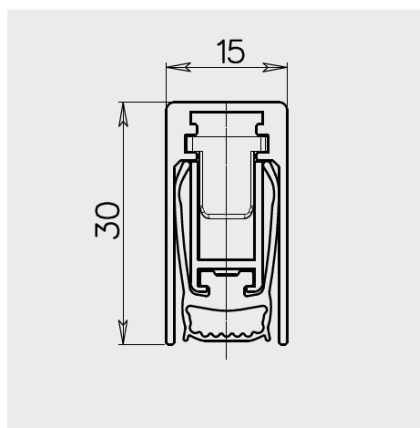


Technical datasheet

4tec^x Valdorpel

Art.nr: 4052000103, 4052000109, 4052000115, 4052000121

**ITEM SIZE (mm)**

15 x 30

GROOVE SIZE (mm)

15,1 x 30

AVAILABLE LENGTHS (mm)

330 - 430 - 530 - 630 - 730 - 830 - 930 - 1030 - 1130 -
1230 - 1330 - 1430 - 1530 - 1630 - 1730 - 1830

MATERIALS

EXTERNAL PROFILE 6060 T6 aluminium alloy

INTERNAL PROFILE 6060 T6 aluminium alloy

AVAILABLE FINISHING Mill

MECHANISMS Nylon PA6 30% Fiberglass reinforced

SEAL HF3. Self extinguishing silicone UL94 class V0. Color: grey

CLOSING END-CAP Included. Nylon PA6 30% Fiberglass reinforced. Color: grey

ACTIVATION PLUNGER 17. Extractable nylon plunger with round head with manual adjustment, no tools required.
Nylon PA6 30% Fiberglass reinforced. Color: grey.

TECHNICAL CHARACTERISTICS

MAXIMUM DROP (mm) 20

WORKING TEMPERATURES (C°) -35° / + 200°

FIXING TYPE 2F. With premounted screws (3,5x30 pan head (wood) or 3,5x32 (steel) countersunk nickel plated screws) or
1F. With stainless steel brackets (includes 3,5x20 countersunk nickel plated screws).

CERTIFICATES

WORKING CYCLES 200.000 (internal test)

ACOUSTIC INSULATION **52dB Rw** - Cert. n. PB-Z03-G03-04-en-01 - IFT Rosenheim

FIRE RESISTANCE **60 minutes** - Cert. n. CFR1605191 / **UL-10C** file nr. R39141

SMOKE TESTED /

ITEM LENGHT mm	ITEM WEIGHT Kgs	BOX WEIGHT Kgs	MAX TRIMMING mm	TRIMMING from -> to mm
330	0,159	7,04	50	330 - > 260
430	0,204	8,84	135	430 - > 295
530	0,251	10,72	150	530 - > 380
630	0,298	12,60	125	630 - > 505
730	0,346	14,80	150	730 - > 580
830	0,394	16,44	150	830 - > 680
930	0,442	18,36	150	930 - > 780
1030	0,489	20,24	150	1030 - > 880
1130	0,536	22,12	150	1130 - > 980

PACKAGING

MINIMUM PACKAGING 1 piece with custom packaging


BOX PACKAGING 40 pieces (except where noted)

ITEM AND PACKAGING CARE

Keep the items inside their original packaging. Keep the boxes in horizontal position, do not bend or overlap heavy weights.

Keep stored in a dry place, protected from water, solvents and direct sunlight.

NO AIR

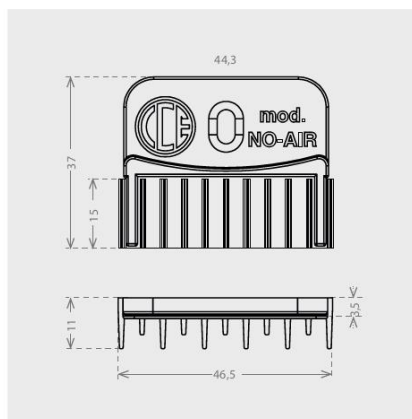

ITEM SIZE (mm)
44 x 37

COMB HEIGHT (mm)
11

AVAILABLE LENGHTS (mm)
/

MATERIALS

HARD PLASTIC SUPPORT Nylon PA6 30% Fiberglass reinforced. Color: black.

SOFT COMB TPV 60 shore. Color: black.

AVAILABLE FINISHING Black (standard), Grey (on request)

MECHANISMS /

SEAL /

CLOSING END-CAP /

ACTIVATION PLUNGER /

TECHNICAL CHARACTERISTICS

MAXIMUM DROP (mm) /

WORKING TEMPERATURES (C°) -35° / + 200°

FIXING TYPE With 3,5x20 countersunk screws (not included).

Available in kit (cod.ACNOAK) of 2 pcs with nr.2 ACNOA + nr.2 countersunk screws in single bag.

CERTIFICATES

WORKING CYCLES /

ACOUSTIC INSULATION /

FIRE RESISTANCE /

SMOKE TESTED /